


DH 5000

(TS-5 series)

DH 5000

Droplet Separator (Mist Eliminator)

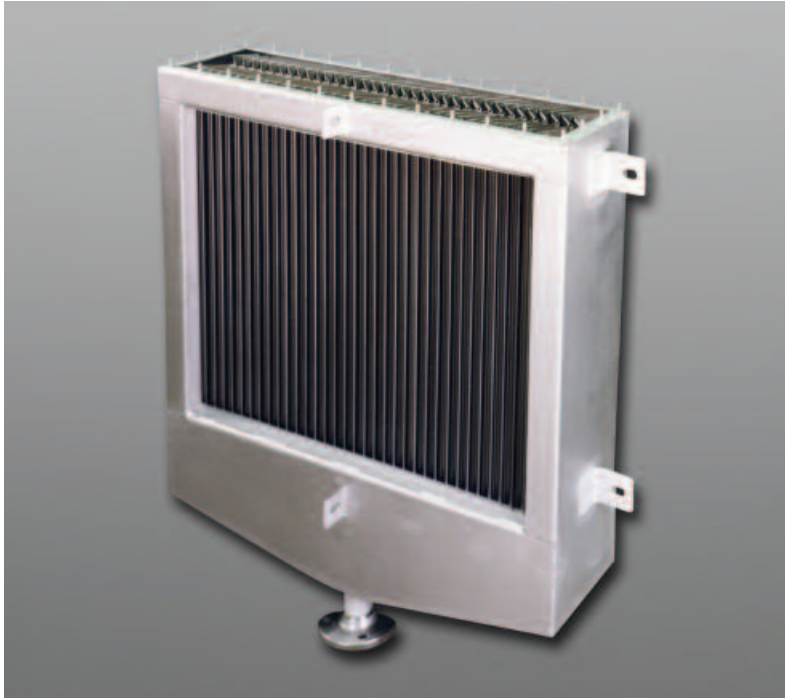

The DH 5000 (TS-5 series) droplet separator is a vane type separator for horizontal flow. The gas flow charged with liquid droplets is directed through eliminator chambers which are designed for maximum effect on the gas flow.

As a result of this configuration, inertial forces act on the droplets. The droplets impinge onto the profiles, where they form a liquid film which is subsequently drained off as a result of gravity. Specially shaped separating chambers ensure that the liquid is drained off in the correct manner while at the same time enhancing the separation of very fine droplets.

The requirements of specific applications are achieved by means of different profile spacing and the use of eliminator profiles with up to four deflection points.

Target applications

- Evaporators
- Absorbers
- Gas scrubbers
- Desulphurization units
- Gas coolers
- Exhaust air treatment plants
- Chemical plant
- Natural gas processing plant

- **Aerodynamically Engineered**

Profiles divide the gas flow into streams, which pass easily through the mist eliminator. Inertia forces liquid droplets to impact the profile wall, where they collect, agglomerate and drain in protected areas of low gas velocity called quiescent zones.

- **Cross Flow Drainage**

Collected liquid drains at 90° to the gas flow, to minimize re-entrainment and allow higher operating velocities.

- **Versatility**

The DH 5000 mist eliminator is available in a variety of configurations to meet the specialized needs of various applications.

- **Low Drag Coefficients**

DH 5000 functions with greater overall efficiency at higher velocities, without excessive pressure drop.

- **Easy Upgrade**

Replaces many original equipment mist eliminators easily.

- **Low Maintenance**

Modules are easy to clean, even during system operation.

- **Durability**

The standard material for Munters' DH 5000 high-mist eliminator vanes is stainless steel DIN 1.4571 (316L). Special materials (e.g. nickel, Monel, etc.) are available upon request. Housings and vessels can be made of stainless and carbon steel and various alloys.

Performance data

All technical performance data apply for a system air / water at 20 °C and 1 bar.


The limit drop size represents a performance characteristic of the profile. At the relevant velocity and operating conditions, it is the size of the smallest droplet that is completely separated.

The pressure loss of a mist eliminator should be as low as possible, in order to ensure favorable operating costs.

The separation efficiency specifies how much liquid the mist eliminator removes from the gas flow. It is customary to specify a maximum permissible inlet load and a guaranteed level of residual liquid content downstream of the eliminator.


Materials

- Stainless steel alloys ASTM 304, 316Ti, 316L, 321; DIN 1.4301, DIN 1.4404, DIN 1.4541, DIN 1.4571
- Special material available upon request

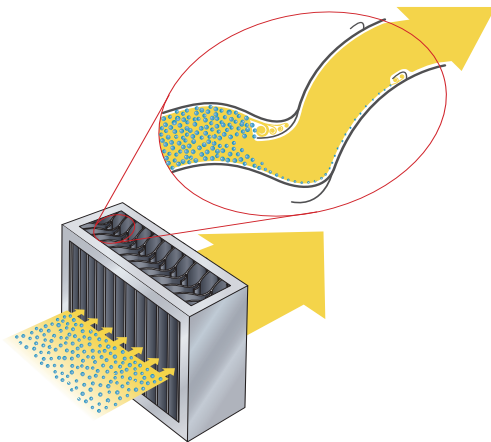


Principle illustration.

Limit drop size DH 5000

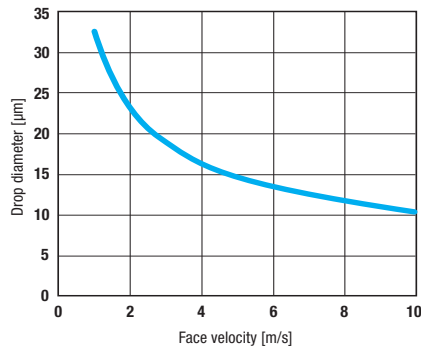

Pressure drop DH 5000

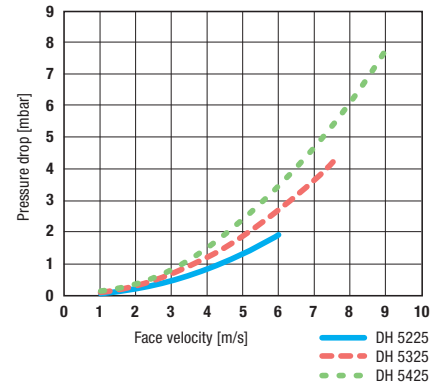


Scope of supply

The DH 5000 is available in different configurations:

- Eliminator packs
- Framed pack for installation as internal
- Eliminator together with casing or pressure vessel
- Framed packs including a support structure
- Cleaning systems

Material certificates can be delivered for most materials upon request. Pressure loss, limit drop sizes and fractional efficiency curves for given operating data are delivered upon request.

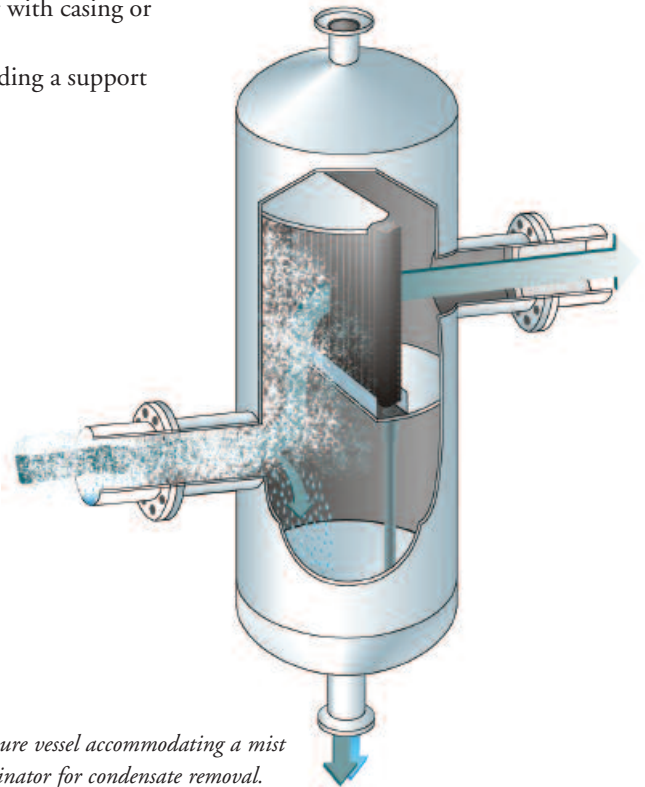

Pressure vessel accommodating a mist eliminator for condensate removal.



Munters, HumiCool Division, Kung Hans Väg 8, P.O. Box 434, SE-191 24 Sollentuna, Sweden. Phone +46 8 626 63 00, Fax +46 8 754 56 66.
 Munters Euroform GmbH, Aachen, Germany, Phone +49 241 89 00 0, Fax +49 241 89 00 5199, munters@muntersac.de
 Munters Corporation, Fort Myers, USA, Phone +1 239 936 1555, Fax +1 239 936 8858, moreinfo_me@americas.munters.com
www.munters.com

Australia Munters Pty Limited, Phone +61 2 6025 6422, Fax +61 2 6025 8266, **Austria** via sales organization in Germany, **Brazil** Munters Brasil Industria e Comercio Ltda, Phone +55 11 5054 0150, Fax +55 11 5054 0883, **China** Munters Air Treatment Equipment (Beijing) Co., Ltd., Phone +86 10 80 481 121, Fax +86 10 80 483 493, **Denmark** via sales organization in Sweden, **Finland** Munters Oy, Phone +358 9 83 86 030, Fax +358 9 83 86 0336, **France** Munters France S.A., Phone +33 1 34 11 57 50, Fax +33 1 34 11 57 51, **Germany** Munters Euroform GmbH, Phone +49 241 89 00 0, Fax +49 241 89 00 5199, **Indonesia** Munters, Phone +62 21 9105446-7, Fax +62 21 5310509, **Italy** Munters Italy S.p.A., Phone +39 0183-52 11, Fax +39 0183-521 333, **Japan** Munters K.K., Phone +81 3 5970 0021, Fax +81 3 5970 3197, **Kingdom of Saudi Arabia and Middle East** Hawa Munters, c/o Hawa United Cooling Syst. Co. Ltd., Phone +966 1 477 15 14, Fax +966 1 476 09 36, **Korea** Munters Korea Co., Ltd, Phone +82 2 761 8701, Fax +82 2 761 8777, **Mexico** Munters Mexico Phone +52 722 270 40 30, Fax +52 722 270 41 95, **Norway** via sales organization in Sweden, **South Africa and Sub-Sahara Countries** Munters (Pty) Ltd, Phone +27 11 971 9700, Fax +27 11 971 9701, **Spain** Munters Spain S.A., Phone +34 91-640 09 02, Fax +34 91-640 11 32, **Sweden** Munters Europe AB, Phone +46 8 626 63 00, Fax +46 8 754 56 66, **Switzerland** via sales organization in Germany, **Thailand** Munters (Thailand) Co. Ltd., Phone +66 2 645 2708-12, Fax +66 2 645 2710, **United Kingdom** Munters Ltd, Phone +44 845 644 3980, Fax +44 845 644 3981, **USA** Munters Corporation **Fort Myers**, Phone +1 239 936 1555, Fax +1 239 936 8858, Munters Corporation **Mason**, Phone +1 888 335 0100, Fax +1 517 676 7078, **Export & Other countries** Munters, Phone +46 8 626 63 00, Fax +46 8 754 56 66.

Your closest distributor